



CLAVIERS - PANELS PC - BOÎTIERS

# 65T-ES ATK

## *Vandalism protected keyboard*

- *for public surroundings*
- *extrem weather conditions*
- *and many more*

### 65T-ES ATK

stainless  
steel



#### **Description:**

- A vandalism protected keyboard with 65 buttons in different layouts in robust processing.
- Almost insensitive to violence.
- Mounting version for prepared mounting shafts.
- Explicitly for surroundings where there is danger by vandalism and/or much customer traffic and/or extrem weather conditions.
- Especially suitable for industrial extreme surroundings.

#### **Features:**

- All electronic components and mechanical guides are protected against ingress of dust and water spray (protection IP 65).
- Convenient and positive operation due to the 1,5 mm travel keys with tactile feel.
- Completely in stainless steel construction 1.4301 (buttons, front plate with 1,5 mm strength).
- Key labelling in laser procedure.
- PCB with electronic components.
- Carbon contact-technology.
- Predestined for the work in public terminals, in machines and devices wich have to work in extreme damp (even splash water) or very dusty surroundings, and many more.

#### **Order number for example:**

**notation:** 65T-ES ATK G  
**article number:** 080100200D00003EE00

More information to each variant and their order numbers, see our web-site at

[www.dskeyboard.com](http://www.dskeyboard.com)

ADPZ

6 rue de la Liberté  
ZI Combeplaine  
42800 Rive de Gier

Tel : (33) 4 77 83 77 03  
Fax : (33) 4 77 83 77 16

Web site : [www.adpz.fr](http://www.adpz.fr)

### Mechanical Data:

- Travel 1,5 mm, tactile feel
- Operation force 0,65 N
- 65 buttons, compact layout
- Durability > 1 million ops.
- Storage temperature -40°C - +70°C
- Operation temperature 0°C - +60°C (optional -20°C - +60°C)
- Protection IP65

### Layouts:

- All variants are possible.

### Variants:

- Custom-designed variants are possible (see our web-site).

### Connecting-Variants:

- PS/2, USB
- Cable straight
- Cable length 1,5 m
- Other length are possible

### Detail views:

- Ergonomic, quadratic 13x13mm button arrangement.



### Electrical Data:

- Power supply + 5 V/DC, max. 15 mA
- 2-key roll over
- Autorepeat
- CE-conformable
- EMC-conformable
- RoHS-conformable



### Principle:

- Contact by a silicon switch pad with carbon contacts.



### Use Possibilities:

- Extreme damp (even splash water) surroundings
- Very dusty surroundings
- Test- and measurement systems
- Machine- and device construction
- Trade and craft
- Industry
- Many frequented areas
- and any more


- Robust steel construction
- Very compact, flat style
- Qualitatively excellent processing

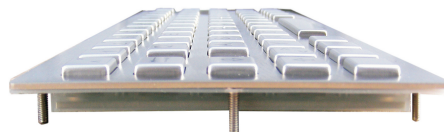

### Dimensions:

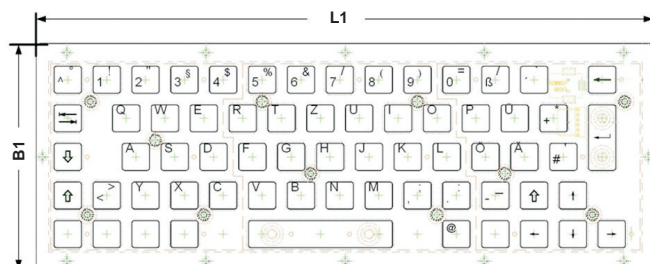

|      |          |
|------|----------|
| L1 = | 303,00mm |
| B1 = | 111,85mm |
| H =  | 18,85mm  |
| H1 = | 16,50mm  |
| H2 = | 1,50mm   |
| H3 = | 2,35mm   |
| H4 = | 10,00mm  |



More information about the measurements can be downloaded from our web-site.



CLAVIERS - PANELS PC - BOÎTIERS

## 65T-ES ATK

stainless  
steel

ADPZ

6 rue de la Liberté  
ZI Combeplaine  
42800 Rive de Gier

Tel : (33) 4 77 83 77 03  
Fax : (33) 4 77 83 77 16

Web site : [www.adpz.fr](http://www.adpz.fr)