



CLAVIERS - PANELS PC - BOÎTIERS

# 82T-ES16-TB25

## *Vandalism protected keyboard*

- for public surroundings
- extrem weather conditions
- and many more

82T-ES16-  
TB25

stainless  
steel



### **Description:**

- A vandalism protected keyboard with 82 buttons in different layouts in very robust processing.
- Integrated 25mm trackball with 3 mouse buttons
- Almost insensitive to violence.
- Mounting version with very low measurements for prepared mounting shafts.
- Explicitly for surroundings where there is danger by vandalism and/or much customer traffic and/or extrem weather conditions.
- Especially suitable for industrial extreme surroundings.

### **Order number for example:**

**notation:** 82T-ES16-TB25 F  
**article number:** 020080103700003EE00

More information to each variant and their order numbers, see our web-site at

[www.dskeyboard.com](http://www.dskeyboard.com)

### **Features:**

- All electronic components and mechanical guides are protected against ingress of dust and water spray (protection IP 65).
- Convenient and positive operation due to the 3,25 mm travel keys with tactile feel.
- Completely in stainless steel construction 1.4301 (buttons, front plate with 3 mm strength).
- Stainless steel trackball with protection IP 65 (static), IP 56 (dynamic).
- Key labelling in laser procedure.
- PCB with electronic components.
- Carbon contact-technology.
- Predestined for the work in public terminals, in machines and devices wich have to work in extreme damp (even splash water) or very dusty surroundings, and many more.

ADPZ

6 rue de la Liberté  
ZI Combeplaine  
42800 Rive de Gier

Tel : (33) 4 77 83 77 03  
Fax : (33) 4 77 83 77 16

Web site : [www.adpz.fr](http://www.adpz.fr)

### Mechanical Data:

- Travel 3,25 mm, tactile feel
- Operation force 0,65 N
- 82 buttons, compact layout
- Durability > 10 million ops.
- Storage temperature -40°C - +70°C
- Operation temperature 0°C - +60°C (optional -20°C - +60°C)
- Protection IP65

### Layouts:

- All variants are possible.

### Variants:

- Custom-designed variants are possible (see our web-site).

### Connecting-Variants:

- PS/2-PS/2 (keyb.-trackb.), USB
- Cable straight or spiral-shaped
- Cable length 1,5 m
- Other length are possible

### Detail views:

- Ergonomic, compact 13mm button arrangement include 25mm trackball.



### Electrical Data:

- Power supply + 5 V/DC, 50 mA
- 2-key roll over
- Autorepeat
- 16k EEPROM memory
- CE-conformable
- EMC-conformable
- RoHS-conformable


### Principle:

- Contact by a silicon switch pad with carbon contacts.


### Use Possibilities:

- Extreme damp (even splash water) surroundings
- Very dusty surroundings
- Test- and measurement systems
- Machine- and device construction
- Trade and craft
- Industry
- Many freequented areas
- and any more

- Very robust steel construction
- Qualitatively excellent processing



### Dimensions:

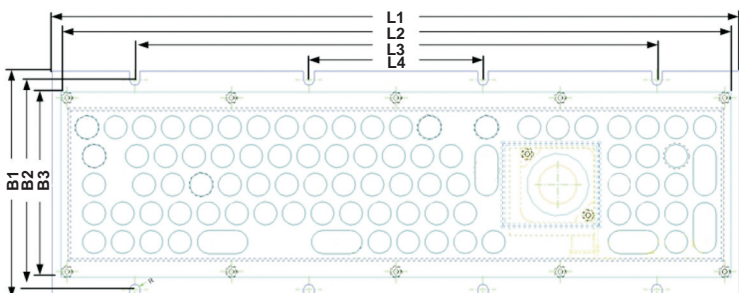

L1 = 395,00mm  
L2 = 385,00mm  
L3 = 300,00mm  
L4 = 100,00mm

B1 = 130,00mm  
B2 = 120,00mm  
B3 = 106,00mm

H = 24,70mm  
H1 = 21,00mm  
H2 = 1,50mm  
H3 = 3,00mm  
H4 = 3,00mm  
H5 = 30,40mm

More information about the measurements can be downloaded from our web-site.



CLAVIERS - PANELS PC - BOÎTIERS

82T-ES16-TB25

stainless steel

ADPZ

6 rue de la Liberté  
ZI Combeplaine  
42800 Rive de Gier

Tel : (33) 4 77 83 77 03  
Fax : (33) 4 77 83 77 16

Web site : [www.adpz.fr](http://www.adpz.fr)