

62T-ES16-TB

Vandalism protected keyboard

- for public surroundings
- extrem weather conditions
- and many more

62T-ES16-TB

stainless
steel



Description:

- A vandalism protected keyboard with 62 buttons in different layouts in very robust processing.
- Integrated 38mm trackball with 3 mouse buttons
- Almost insensitive to violence.
- Mounting version with very low measurements for prepared mounting shafts.
- Explicitly for surroundings where there is danger by vandalism and/or much customer traffic and/or extrem weather conditions.
- Especially suitable for industrial extreme surroundings.

Order number for example:

notation: 62T-ES16-TB I
article number: 040031203700003EE00

Features:

- All electronic components and mechanical guides are protected against ingress of dust and water spray (protection IP 65).
- Convenient and positive operation due to the 3,25 mm travel keys with tactile feel.
- Completely in stainless steel construction 1.4301 (buttons, front plate with 3 mm strength).
- Stainless steel trackball with protection IP 65 (static), IP 56 (dynamic).
- Key labelling in laser procedure.
- PCB with electronic components.
- Carbon contact-technology.
- Predestined for the work in public terminals, in machines and devices wich have to work in extreme damp (even splash water) or very dusty surroundings, and many more.

ADPZ

6 rue de la Liberté
ZI Combeplaine
42800 Rive de Gier

Tel : (33) 4 77 83 77 03
Fax : (33) 4 77 83 77 16

Web site : www.adpz.fr

Mechanical Data:

- Travel 3,25 mm, tactile feel
- Operation force 0,65 N
- 62 buttons, compact layout
- Durability > 10 million ops.
- Storage temperature -40°C - +70°C
- Operation temperature 0°C - +60°C (optional -20°C - +60°C)
- Protection IP65

Layouts:

- All variants are possible.

Variants:

- Custom-designed variants are possible (see our web-site).

Connecting-Variants:

- PS/2-PS/2 (keyb.-trackb.), USB
- Cable straight or spiral-shaped
- Cable length 1,5 m
- Other length are possible

Detail views:

- Ergonomic, compact 13mm button arrangement include 38mm trackball.



Electrical Data:

- Power supply + 5 V/DC, 50 mA
- 2-key roll over
- Autorepeat
- 16k EEPROM memory
- CE-conformable
- EMC-conformable
- RoHS-conformable


Principle:

- Contact by a silicon switch pad with carbon contacts.


Use Possibilities:

- Extreme damp (even splash water) surroundings
- Very dusty surroundings
- Test- and measurement systems
- Machine- and device construction
- Trade and craft
- Industry
- Many freequented areas
- and any more

- Very robust steel construction
- Qualitatively excellent processing

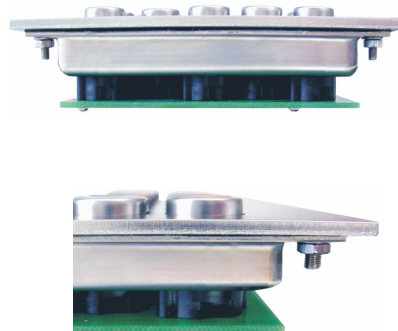

Dimensions:

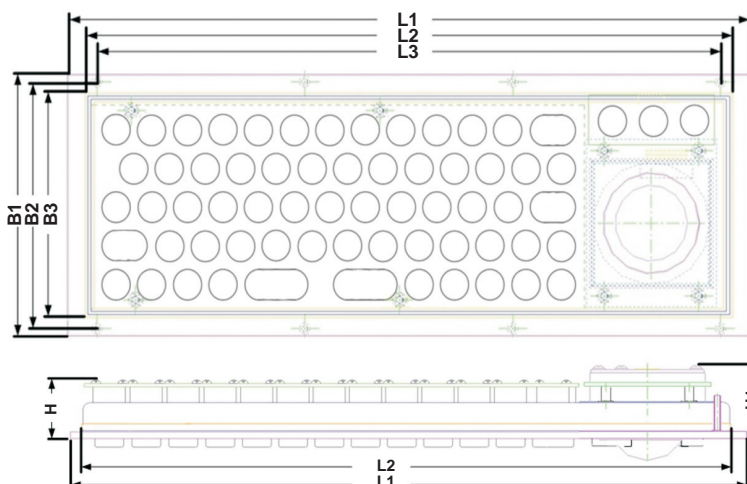

L1 =	315,00mm
L2 =	299,00mm
L3 =	288,00mm
B1 =	115,00mm
B2 =	109,00mm
B3 =	99,00mm
H =	27,55mm
H1 =	32,75mm
H2 =	21,50mm
H3 =	3,00mm
H4 =	3,50mm
H5 =	41,00mm

More information about the measurements can be downloaded from our web-site.

62T-ES16-TB

stainless steel

ADPZ
6 rue de la Liberté
ZI Combeplaine
42800 Rive de Gier

Tel : (33) 4 77 83 77 03
Fax : (33) 4 77 83 77 16

Web site : www.adpz.fr