

# 62T-ES16

## Vandalism protected keyboard

- for public surroundings
- extrem weather conditions
- and many more

62T-ES16

stainless  
steel



### Description:

- A vandalism protected keyboard with 62 buttons in different layouts in very robust processing.
- Almost insensitive to violence.
- Mounting version with very low measurements for prepared mounting shafts.
- Explicitly for surroundings where there is danger by vandalism and/or much customer traffic and/or extrem weather conditions.
- Especially suitable for industrial extreme surroundings.

### Order number for example:

notation: 62T-ES16 G  
article number: 040030200700003EE00

### Features:

- All electronic components and mechanical guides are protected against ingress of dust and water spray (protection IP 65).
- Convenient and positive operation due to the 3,25 mm travel keys with tactile feel.
- Completely in stainless steel construction 1.4301 (buttons, front plate with 3 mm strength).
- Key labelling in laser procedure.
- PCB with electronic components.
- Carbon contact-technology.
- Predestined for the work in public terminals, in machines and devices wich have to work in extreme damp (even splash water) or very dusty surroundings, and many more.

ADPZ

6 rue de la Liberté  
ZI Combeplaine  
42800 Rive de Gier

Tel : (33) 4 77 83 77 03  
Fax : (33) 4 77 83 77 16

Web site : [www.adpz.fr](http://www.adpz.fr)

**Mechanical Data:**

- Travel 3,25 mm, tactile feel
- Operation force 0,65 N
- 62 buttons, compact layout
- Durability > 10 million ops.
- Storage temperature -40°C - +70°C
- Operation temperature 0°C - +60°C (optional -20°C - +60°C)
- Protection IP65

**Layouts:**

- All variants are possible.

**Variants:**

- Custom-designed variants are possible (see our web-site).

**Connecting-Variants:**

- PS/2, USB
- Cable straight or spiral-shaped
- Cable length 1,5 m
- Other length are possible

**Detail views:**

- Ergonomic, compact 13mm button arrangement on the smallest area.



**Electrical Data:**

- Power supply + 5 V/DC, 50 mA
- 2-key roll over
- Autorepeat
- 16k EEPROM memory
- CE-conformable
- EMC-conformable
- RoHS-conformable


**Principle:**

- Contact by a silicon switch pad with carbon contacts.



**Use Possibilities:**

- Extreme damp (even splash water) surroundings
- Very dusty surroundings
- Test- and measurement systems
- Machine- and device construction
- Trade and craft
- Industry
- Many frequented areas
- and any more

- Very robust steel construction
- Qualitatively excellent processing

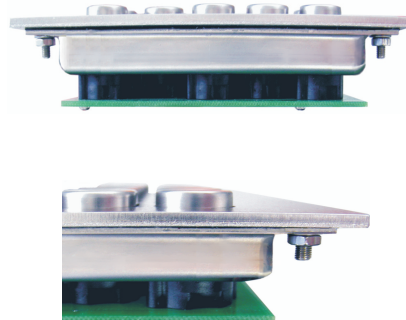

**Dimensions:**

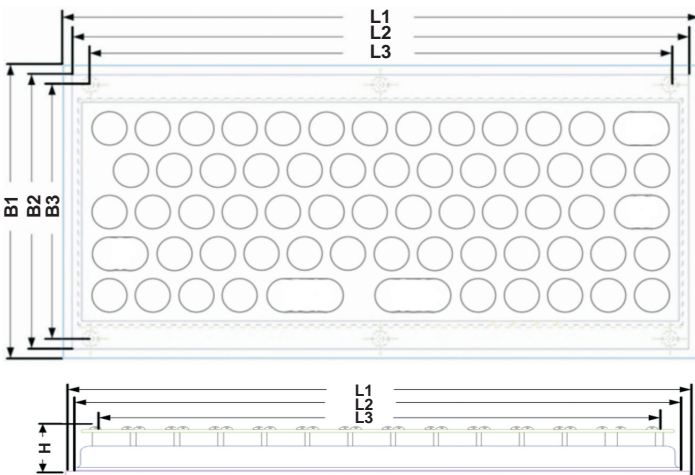

L1 = 240,00mm  
L2 = 233,00mm  
L3 = 219,00mm

B1 = 115,00mm  
B2 = 108,00mm  
B3 = 100,00mm

H = 21,50mm  
H1 = 21,50mm  
H2 = 3,00mm  
H3 = 3,75mm

More information about the measurements can be downloaded from our web-site.

**62T-ES16**

stainless steel

**ADPZ**

**6 rue de la Liberté  
ZI Combeplaine  
42800 Rive de Gier**

**Tel : (33) 4 77 83 77 03  
Fax : (33) 4 77 83 77 16**

**Web site : [www.adpz.fr](http://www.adpz.fr)**