



CLAVIERS - PANELS PC - BOÎTIERS

DSTB38

stainless
steel
or
black
plastic
ball

DSTB38

Vandalism protected trackball

- *for public surroundings*
- *extrem weather conditions*
- *and many more*



Description:

- A vandalism protected trackball in very robust processing.
- Can be a full pointing device with up to integrated 3 mouse buttons.
- Almost insensitive to violence.
- Mounting element with very low measurements for keyboards, independent trackballs and other instruments.
- Especially for surroundings where there is danger by vandalism and/or much customer traffic and/or extrem weather conditions.
- Is especially suited to instruments which works in industrial extreme surroundings.

Features:

- All electronic components and mechanical guides are protected against ingress of dust and water spray (protection IP 65).
- With button modul convenient and positive operation due to the 3,25 mm travel keys with tactile feel.
- Stainless steel ball or black plastic ball, 38mm, with protection IP 65 (static), IP 56 (dynamic).
- Certain accurate pointer control about the stainless steel axis.
- PCB with electronic components.
- Predestined for the work in public terminals, in machines and devices wich have to work in extreme damp or very dusty surroundings, and many more.

Order number for example:

notation: DSTB38-ES Q
article number: 0400700T3B00000EE00

More information to each variant and their order numbers,
see our web-site at

www.dskeyboard.com

ADPZ

6 rue de la Liberté
ZI Combeplaine
42800 Rive de Gier

Tel : (33) 4 77 83 77 03
Fax : (33) 4 77 83 77 16

Web site : www.adpz.fr

Mechanical Data:

- Durability > 2 million turns
- Mounting angle max. 45°
- Weight 270gr
- Storage temperature -25°C - +80°C
- Operation temperature 0°C - +60°C
- Protection IP65 (static)

Variants:

- Operating modes are possible in quadrature, PS/2 and USB

Connecting-Variants:

- PS/2, USB, SubD
- Cable straight or spiral-shaped
- Cable length 1,5 m
- Other length are possible

Detail views:

- Qualitatively excellent processing
- Connecting by JST-Connector
- Stainless steel axis
- Impact-resistant polyamid enclosure
- Accurate guidance of the axis



Electrical Data:

- Power supply + 5 V/VDC, 50 mA
- Current consumption max. 5mA
- CE-conformable
- EMC-conformable
- RoHS-conformable

Principle:

- With button module contact by a silicon switch pad with carbon contacts.

Use Possibilities:

- Extreme damp (even splash water) surroundings
- Very dusty surroundings
- Test- and measurement systems
- Machine- and device construction
- Trade and craft
- Industry
- Many freequented areas
- and any more

Mode connections:

- Connection allocations for the different modes (must be modified by factory side):

10pin JST-Connector

- | | | |
|----|---|------------|
| 1 | — | X1 |
| 2 | — | X2 |
| 3 | — | Y1 |
| 4 | — | Y2 |
| 5 | — | PS/2 M Dat |
| 6 | — | PS/2 M CLK |
| 7 | — | VCC |
| 8 | — | USB D- |
| 9 | — | USB D+ |
| 10 | — | GND |


CON 1

4pin Connector

- | | | |
|---|---|-----------------|
| 1 | — | GND |
| 2 | — | Left M Button |
| 3 | — | Right M Button |
| 4 | — | Middle M Button |

CON 2

Dimensions:

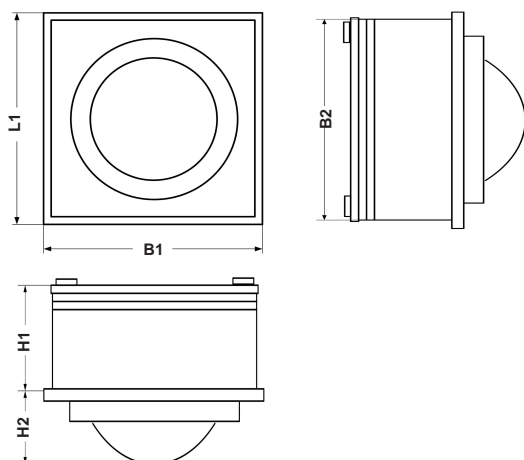

L1 = 58,00mm

B1 = 58,00mm

B2 = 54,00mm

H1 = 24,00mm

H2 = 16,00mm

More information about the measurements can be downloaded from our web-site.



CLAVIERS - PANELS PC - BOÎTIERS

DSTB38

stainless
steel
or
black
plastic
ball

ADPZ

6 rue de la Liberté
ZI Combeplaine
42800 Rive de Gier

Tel : (33) 4 77 83 77 03

Fax : (33) 4 77 83 77 16

Web site : www.adpz.fr